
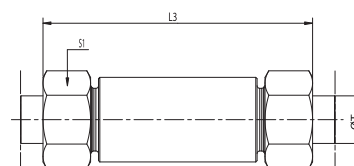


# E 313

Raccordi saldabili Passaparatia  
Weldable bulkhead Couplings  
Einschweiß-Schottverschraubungen

ISO 8434-1

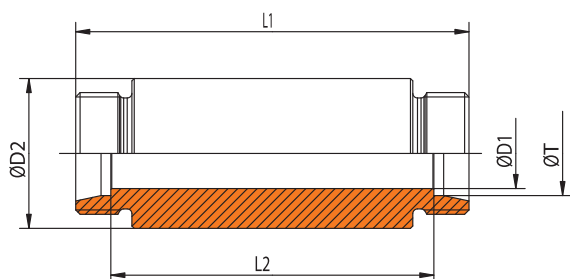

SERIE Series Reihe	Pressione Pressure Druck	Ø T	CODICE Part n° Bestell. nr.	DESCRIZIONE Description Bestellzeichen	S1	Ø D1	Ø D2	L1	L2	L3
L	PN 500	6	E 313 8 006 000	<b>E 313 - 06 L</b>	14	4	18	70	56	86
L	PN 500	8	E 313 8 008 000	<b>E 313 - 08 L</b>	17	6	20	70	56	86
L	PN 500	10	E 313 8 010 000	<b>E 313 - 10 L</b>	19	8	22	72	58	88
L	PN 400	12	E 313 8 012 000	<b>E 313 - 12 L</b>	22	10	25	72	58	88
L	PN 400	15	E 313 8 015 000	<b>E 313 - 15 L</b>	27	12	28	84	70	100
L	PN 400	18	E 313 8 018 000	<b>E 313 - 18 L</b>	32	15	32	84	69	102
L	PN 250	22	E 313 8 022 000	<b>E 313 - 22 L</b>	36	19	36	88	73	106
L	PN 250	28	E 313 8 028 000	<b>E 313 - 28 L</b>	41	24	40	88	73	106
L	PN 250	35	E 313 8 035 000	<b>E 313 - 35 L</b>	50	30	50	92	71	114
L	PN 250	42	E 313 8 042 000	<b>E 313 - 42 L</b>	60	36	60	92	70	116
S	PN 630	6	E 313 9 006 000	<b>E 313 - 06 S</b>	17	4	20	74	60	90
S	PN 630	8	E 313 9 008 000	<b>E 313 - 08 S</b>	19	5	22	74	60	90
S	PN 630	10	E 313 9 010 000	<b>E 313 - 10 S</b>	22	7	25	74	59	92
S	PN 630	12	E 313 9 012 000	<b>E 313 - 12 S</b>	24	8	28	74	59	92
S	PN 630	14	E 313 9 014 000	<b>E 313 - 14 S</b>	27	10	30	88	72	108
S	PN 420	16	E 313 9 016 000	<b>E 313 - 16 S</b>	30	12	35	88	71	108
S	PN 420	20	E 313 9 020 000	<b>E 313 - 20 S</b>	36	16	38	92	71	114
S	PN 420	25	E 313 9 025 000	<b>E 313 - 25 S</b>	46	20	45	96	72	120
S	PN 420	30	E 313 9 030 000	<b>E 313 - 30 S</b>	50	25	50	100	73	126
S	PN 315	38	E 313 9 038 000	<b>E 313 - 38 S</b>	60	32	60	104	72	134

Temperature di utilizzo senza riduzione di pressione: da -40° a +120°C. Trattamento superficiale di brunitura (solo corpo).

Permissible working temperatures without reductions in pressure: -40° to +120°C. Surface treatment: burnishing (only body).

Zulässige Betriebstemperatur ohne Druckabschläge: -40° bis +120°C. Oberflächenschutz: Schwarzbrennen (Körper).