


E 722

Raccordi di Riduzione Maschio — Femmina con Guarnizione
Male — Female reducing Adapters with captive Seal
Reduzierstutzen mit Dichtung

ISO 1179-1 / ISO 1179-2

Filettatura: BSP cilindrica (DIN ISO 228) - Thread: BSP cyl. (DIN ISO 228) - Gewinde: BSP zyl. (DIN ISO 228)

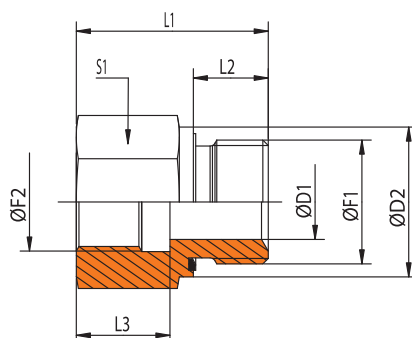

Pressione Pressure Druck	CODICE Part n° Bestell. nr.	DESCRIZIONE Description Bestellzeichen	Ø F1	Ø F2	S1	Ø D1	Ø D2	L1	L2	L3
PN 400	E 722 0 104 106	E 722 - 1/8" - 1/4"	G 1/8"	G 1/4"	19	4	14	31	8	17
PN 400	E 722 0 104 110	E 722 - 1/8" - 3/8"	G 1/8"	G 3/8"	24	4	14	32	8	17
PN 400	E 722 0 106 104	E 722 - 1/4" - 1/8"	G 1/4"	G 1/8"	19	5	19	28	12	12
PN 400	E 722 0 106 110	E 722 - 1/4" - 3/8"	G 1/4"	G 3/8"	24	5	19	36	12	17
PN 400	E 722 0 106 113	E 722 - 1/4" - 1/2"	G 1/4"	G 1/2"	27	5	19	40	12	20
PN 400	E 722 0 106 119	E 722 - 1/4" - 3/4"	G 1/4"	G 3/4"	36	5	19	43	12	22
PN 400	E 722 0 110 106	E 722 - 3/8" - 1/4"	G 3/8"	G 1/4"	22	8	22	36	12	17
PN 400	E 722 0 110 113	E 722 - 3/8" - 1/2"	G 3/8"	G 1/2"	27	8	22	41	12	20
PN 315	E 722 0 110 119	E 722 - 3/8" - 3/4"	G 3/8"	G 3/4"	36	8	22	44	12	22
PN 400	E 722 0 113 110	E 722 - 1/2" - 3/8"	G 1/2"	G 3/8"	27	12	27	36	14	17
PN 315	E 722 0 113 119	E 722 - 1/2" - 3/4"	G 1/2"	G 3/4"	36	12	27	46	14	22
PN 315	E 722 0 113 125	E 722 - 1/2" - 1"	G 1/2"	G 1"	41	12	27	49	14	24,5
PN 315	E 722 0 113 132	E 722 - 1/2" - 1"1/4	G 1/2"	G 1"1/4	55	10	27	53	14	26,5
PN 315	E 722 0 119 113	E 722 - 3/4" - 1/2"	G 3/4"	G 1/2"	32	16	32	41	16	20
PN 315	E 722 0 119 125	E 722 - 3/4" - 1"	G 3/4"	G 1"	41	16	32	51	16	24,5
PN 315	E 722 0 119 132	E 722 - 3/4" - 1"1/4	G 3/4"	G 1"1/4	55	16	32	55	16	26,5
PN 250	E 722 0 119 138	E 722 - 3/4" - 1"1/2	G 3/4"	G 1"1/2	60	16	32	57	16	28,5
PN 315	E 722 0 125 119	E 722 - 1" - 3/4"	G 1"	G 3/4"	41	20	40	47	18	22
PN 315	E 722 0 125 132	E 722 - 1" - 1"1/4	G 1"	G 1"1/4	55	20	40	57	18	26,5
PN 250	E 722 0 125 138	E 722 - 1" - 1"1/2	G 1"	G 1"1/2	60	20	40	59	18	28,5
PN 315	E 722 0 132 125	E 722 - 1"1/4 - 1"	G 1"1/4	G 1"	50	25	50	52	20	24,5
PN 250	E 722 0 132 138	E 722 - 1"1/4 - 1"1/2	G 1"1/4	G 1"1/2	60	25	50	60	20	28,5
PN 250	E 722 0 138 132	E 722 - 1"1/2 - 1"1/4	G 1"1/2	G 1"1/4	55	32	55	58	22	26,5

Temperature di utilizzo senza riduzione di pressione con guarnizioni in NBR: da -35° a +100°C.

Permissible working temperatures without reductions in pressure for captive seals in NBR: -35° to +100°C.

Zulässige Betriebstemperatur ohne Druckabschläge für Dichtungen aus NBR: -35° bis +100°C.