



Raccordi maschi filetto metrico sede 24°
Males 24° metric thread
Aussengewindenippel 24° metrisch Gewind
ISO 12151-2 (ISO 8434-1)

CEL Serie leggera
 Light
 Leicht

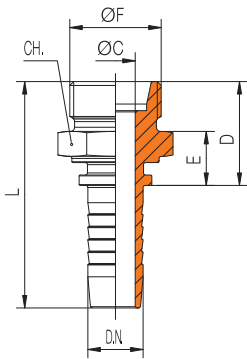

CODICE Part n° Bestell. nr.	DN 24° ND 24° DN 24°	Filetto Thread Gewinde	Ø F ø F ø F	DN Tubo ND Hose DN Schlauch	CH	L	Ø C	D	E
S 30 14 8 906 005	06L	M 12x1,5	3/16"	05	14	43	3	21	11
S 30 14 8 906 006	06L	M 12x1,5	1/4"	06	14	49	4	21	11
S 30 14 8 908 006	08L	M 14x1,5	1/4"	06	17	49	4	21	11
S 30 14 8 910 006	10L	M 16x1,5	1/4"	06	17	50	4	22	11
S 30 14 8 910 008	10L	M 16x1,5	5/16"	08	17	50	5,5	22	11
S 30 14 8 910 010	10L	M 16x1,5	3/8"	10	17	52,5	7	23	12
S 30 14 8 912 006	12L	M 18x1,5	1/4"	06	19	51	4	23	12
S 30 14 8 912 008	12L	M 18x1,5	5/16"	08	19	51	5,5	23	12
S 30 14 8 912 010	12L	M 18x1,5	3/8"	10	19	52,5	7	23	12
S 30 14 8 915 010	15L	M 22x1,5	3/8"	10	24	53,5	7	24	12
S 30 14 8 915 013	15L	M 22x1,5	1/2"	13	24	54,5	9,5	25	13
S 30 14 8 918 013	18L	M 26x1,5	1/2"	13	27	55,5	9,5	26	14
S 30 14 8 918 016	18L	M 26x1,5	5/8"	16	27	60	12,5	26	14
S 30 14 8 922 019	22L	M 30x2	3/4"	19	32	68,5	15	29,5	15,5
S 30 14 8 928 025	28L	M 36x2	1"	25	41	77,5	19,5	30,5	16,5
S 30 14 8 935 032	35L	M 45x2	1"1/4	32	46	91	26	36,5	20,5
S 30 14 8 942 038	42L	M 52x2	1"1/2	38	55	95,5	32	37,5	21,5

CES Serie pesante
 Heavy
 Schwer



S 30 14 9 908 006	08S	M 16x1,5	1/4"	06	17	54	4	26	14
S 30 14 9 910 006	10S	M 18x1,5	1/4"	06	19	54	4	26	14
S 30 14 9 910 008	10S	M 18x1,5	5/16"	08	19	54	5,5	26	14
S 30 14 9 910 010	10S	M 18x1,5	3/8"	10	19	55,5	7	26	14
S 30 14 9 912 008	12S	M 20x1,5	5/16"	08	22	56	5,5	28	16
S 30 14 9 912 010	12S	M 20x1,5	3/8"	10	22	57,5	7	28	16
S 30 14 9 914 010	14S	M 22x1,5	3/8"	10	24	59,5	7	30	16
S 30 14 9 916 013	16S	M 24x1,5	1/2"	13	27	60,5	9,5	31	17
S 30 14 9 920 016	20S	M 30x2	5/8"	16	32	69	12,5	35	19
S 30 14 9 920 019	20S	M 30x2	3/4"	19	32	75,5	15	36,5	20,5
S 30 14 9 925 019	25S	M 36x2	3/4"	19	36	79,5	15	40,5	22,5
S 30 14 9 925 025	25S	M 36x2	1"	25	36	87,5	19,5	40,5	22,5
S 30 14 9 930 025	30S	M 42x2	1"	25	46	89,5	19,5	42,5	22,5
S 30 14 9 938 032	38S	M 52x2	1"1/4	32	55	104	26	49,5	27,5